

1×3 单模双窗宽带分路器


 1x3 Cross Section	特点
	低 PDL 低插入损耗 稳定可靠 紧凑的尺寸
	应用
	光通信系统 光学测试系统 光纤传感器 光功率分配器

规格参数			分光比 33:33:33	
Parameter	Unit		Premium	A Grade
Port Configuration			1×3	
Bandwidth	nm		1310±40 and 1550±40	
Insertion Loss	Max	dB	5.6	6.0
Excess Loss	Typ	dB	0.15	0.2
Uniformity	Max	dB	1.2	1.6
PDL	Max	dB	0.25	0.30
Operating Power	Max	W	5	
Operating Temperature		°C	-40 to +85	
Storage Temperature		°C	-50 to +85	
Package Type	mm		S6: Φ3×54 for bare fiber	
			S8: Φ3×70 for 900μm loose tube	
			M2: 7.5×18×90 for 900μm loose tube or 2mm cable or	
			3mm cable	

典型谱图



上海尖丰光电技术有限公司

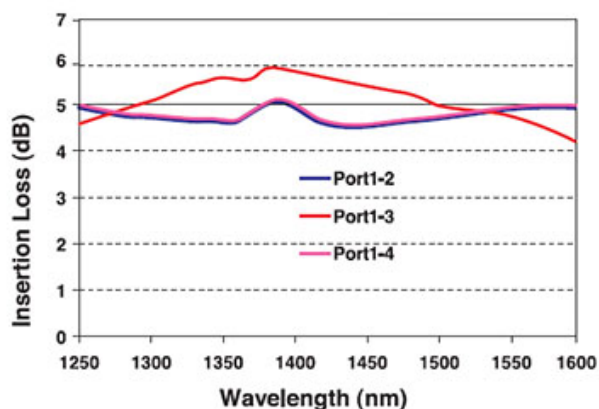

订单信息

D	B	S									
			波长	结构	分光比	等级	封装	光纤类型	尾纤	光纤长度	连接头
			0=1310&1550nm	3=1×3	33=33:33:33	P=Premium A=A Grade	5=S6 7=S8 D=M1	1=SMF-28e	S=250μm bare fiber M=900μm loose tube L=3mm cable R=2mm cable	0=0.5m 1=0.75m 2=1.0m S=Specify	0=None 1=FC/PC 2=FC/SPC 3=FC/APC 4=SC/SPC 5=SC/APC 6=ST 7=FC/UPC 8=SC/UPC 9=MU A=LC B=SC/PC C=LC/UPC D=LC/APC

Note:

1. Central Wavelength can be customized for different applications.
2. All specifications are subject to change without notice.